




CORNER PEDESTRIAN RAMP
(FOR NEW CONSTRUCTION)

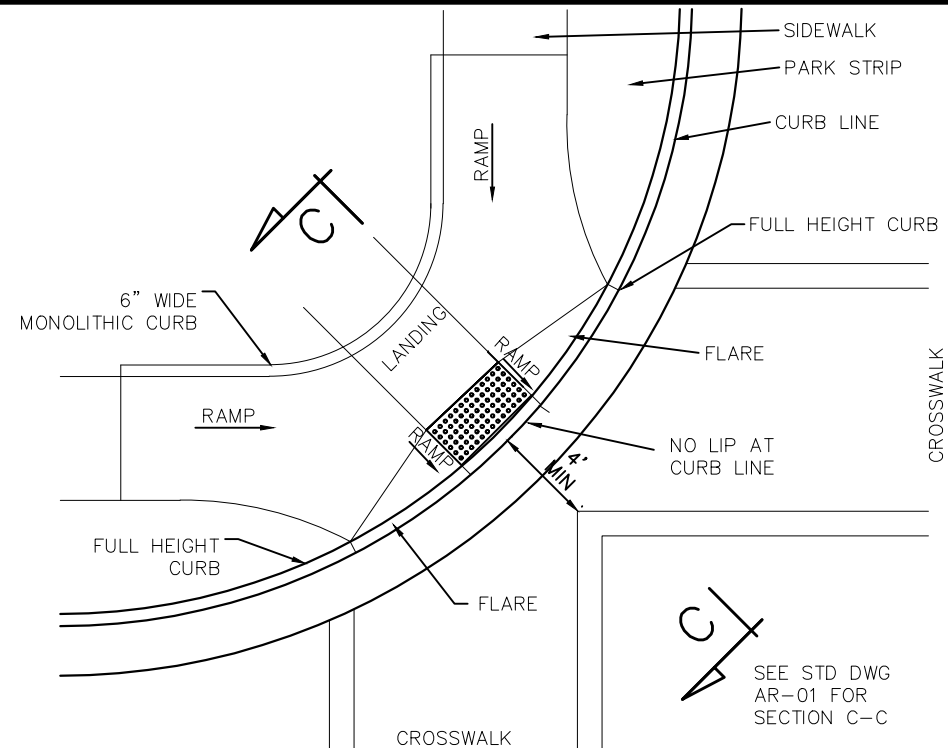

CORNER PEDESTRIAN RAMP
(FOR RECONSTRUCTION AT TIGHT CORNERS)

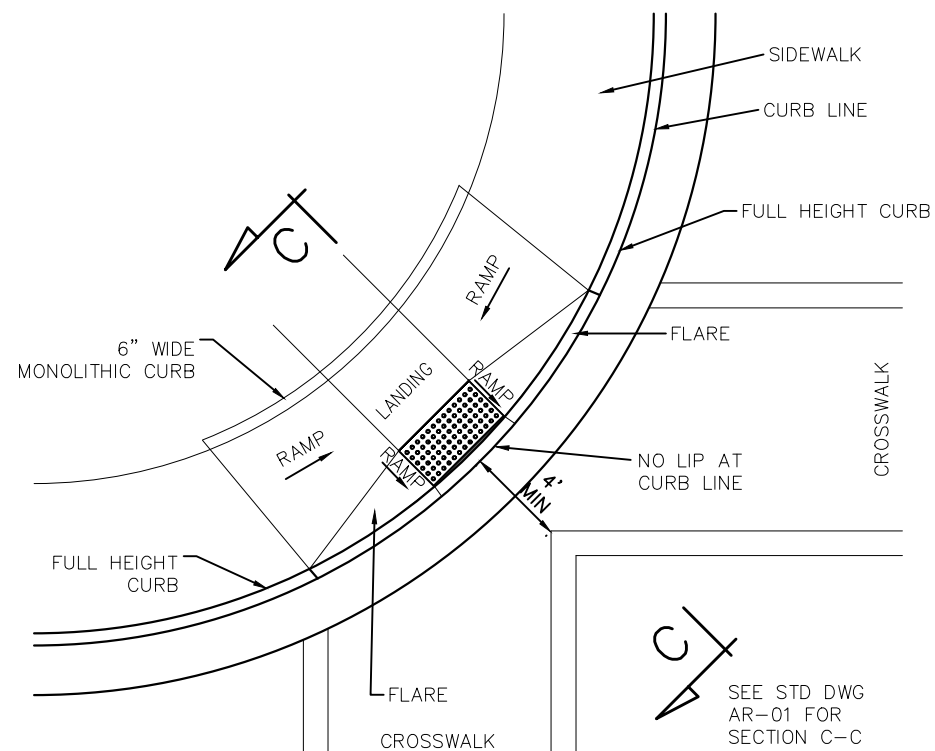

CORNER PEDESTRIAN RAMP

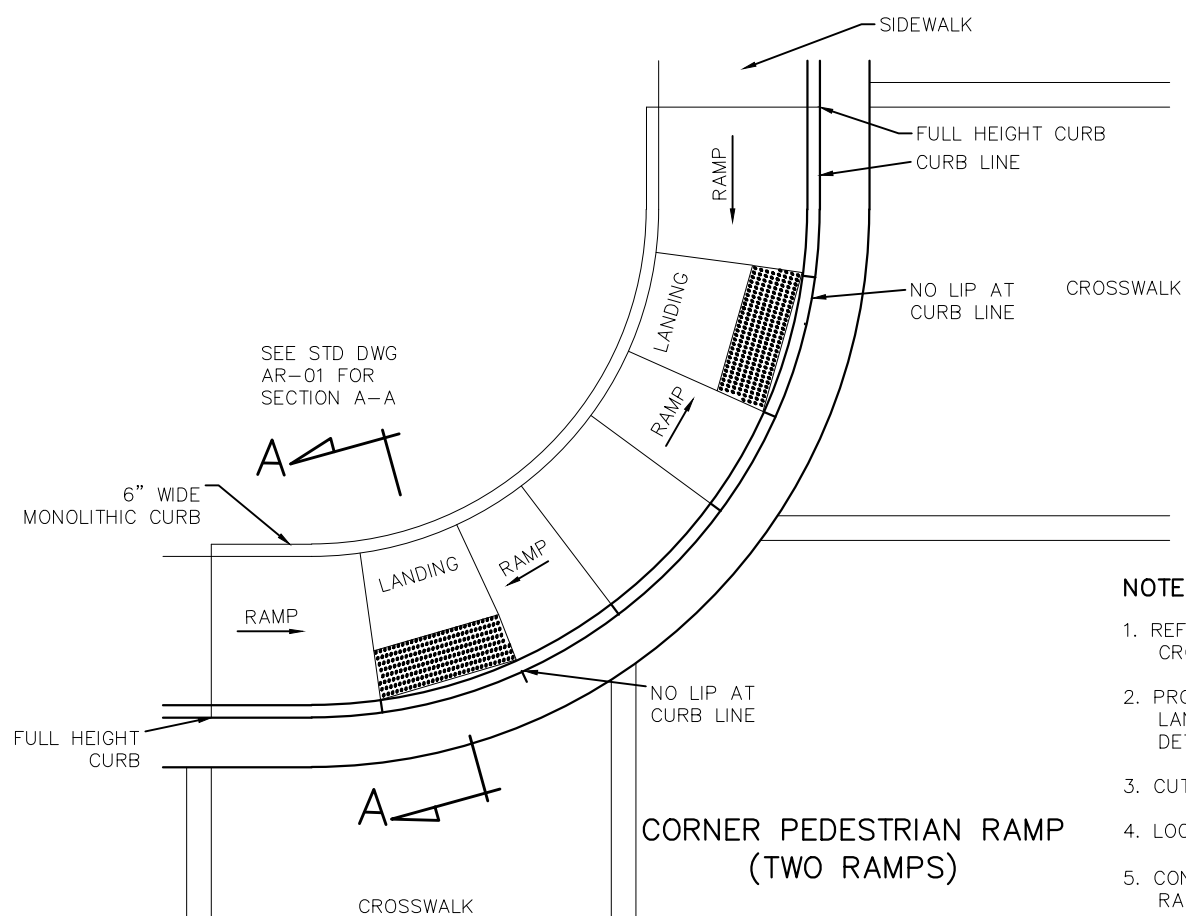

CORNER PEDESTRIAN RAMP
(TWO RAMPS)

NOTES:

1. REFER TO STD DWG AR-01 FOR PEDESTRIAN ACCESS RAMP CROSS SECTIONS AND SLOPE REQUIREMENTS.
2. PROVIDE DETECTABLE WARNING SURFACE FOR FULL WIDTH OF RAMP, LANDING, OR CURB CUT. SEE DETAIL A ON STD DWG AR-01 FOR DETECTABLE WARNING SURFACE DIMENSIONS.
3. CUTTING DETECTABLE PANELS IS NOT ALLOWED.
4. LOCATE CURB CUT WITHIN CROSSWALK.
5. CONCRETE SHALL BE A MINIMUM OF 6" THICK THROUGH RAMPS, WINGS, LANDINGS, AND ADA TILES.

STANDARD DETAIL
AR-02
STANDARD CORNER ACCESS RAMP



4-24-08	1-5-15	DATE
APPROACH WIDTH ADD NOTE 5		REVISIONS
M. GLADBACH		AUTHORIZED BY
1	2	NO.